


6-inch High Speed PTZ Dome Camera




DH-SD6665-H: 26x optical zoom, 480TV lines



Features

- SONY high resolution WDR camera module
  - 1/4 type EXview HAD CCD
  - Powerful 26x optical zoom(3.5mm~91.0mm): DH-SD6665-H
  - High resolution of 480 TV Lines
  - Day/Night(ICR), Auto iris, Auto focus, AWB, Backlight compensation
  - Up to 24 zones of privacy masking(8 zones per area)
  - Max 400°/s pan & tilt speed, 360° endless pan rotation
- Up to 255 Presets, 5 Auto Scan, 8 Tour, 5 Pattern
  - Idle Motion: Activation of Preset/Scan/Tour/Pattern after idle time
  - Time Task: Activation of Preset/Scan/Tour/Pattern by pre-set time
  - Power up action: Auto restore to previous PTZ status after power up
  - Multi-language OSD menu
  - 7/2 channel alarm input/output
  - 3D positioning control at DH-SD protocol
  - IP 66 protection level, constant temperature & anti-fog
  - AMP slot for easy installation

Dimensions (mm)

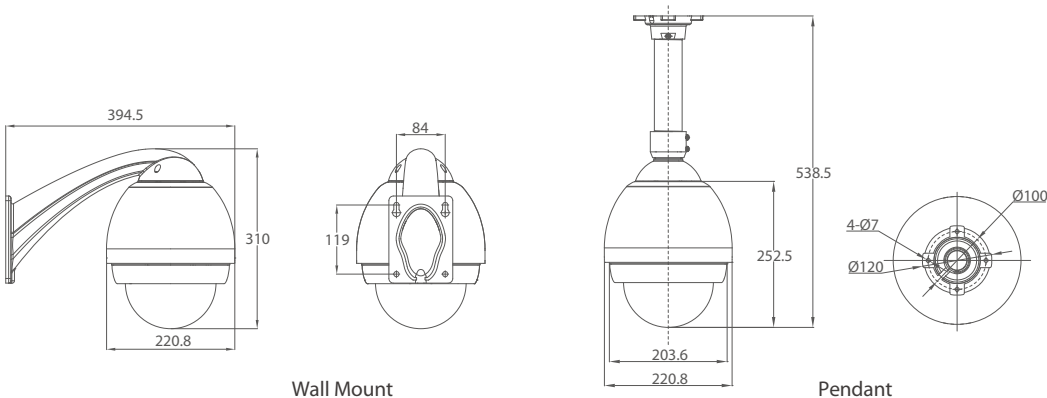

## Specifications

Model		DH-SD6665
Camera	Image Sensor	1/4" EXview HAD CCD
	Effective Pixels	NTSC: 440,000 (752 x 582)
	(H x V)	PAL: 380,000 (768 x 494)
	Horizontal Resolution	480TV Lines
	Focal Length	3.5mm(Wide)~91.0mm(Tele), F1.6~F3.8
	FOV	54.2°(Wide)~2.2°(Tele)
	Closest Focal Distance	320mm(Wide)~1500mm(Tele)
	Optical Zoom	26x
	Digital Zoom	12x
	Min. Illumination	1.0Lux/F1.6(Color), 0.01Lux/F1.6(B/W)
	Electronic Shutter	NTSC:1/4~1/10000s, PAL:1/3~1/10000s , 20level
	Signal Noise Ratio	>50dB
	Backlight Compensation	On/Off
	White Balance	Auto/ATW/Indoor/Outdoor/Manual
	Day/Night	ICR
	Privacy Masking	On/Off(MAX. 24 zones)
	Video Output	BNC(1.0Vp-p, 75Ω), NTSC/PAL
Dome Drive	Pan/Tilt Range	Horizontal: 0°~360°endless, Vertical: -2°~90°auto flip
	Manual Control Speed	Horizontal: 0.1°~300°/s, Vertical: 0.1°~150°/s
	Preset Speed	Horizontal: 400°/s, Vertical: 180°/s
	Preset Positions	255
	PTZ Mode	5 Auto Scan, 8 Tour, 5 Pattern
	Alarm	7/2 alarm input/output, Triggering Preset/Tour/Pattern/Scan
	Auto Speed Control	Automatic focal length/speed adaptation
	3D Positioning	Yes
	Protocol	DH-SD, Pelco-P/D
	Fan & Heater	Automatic fan and heater control
General	Protection	IP66
	Protection Circuit	3000V lightning protection, surge protection
	Working Temperature	-40~60°C
	Working Humidity	10%~90%
	Power Supply	AC 24V/3A(±10%)
	Power Consumption	12W(normal), 50W(heater working)
	Weight	5.0kg